






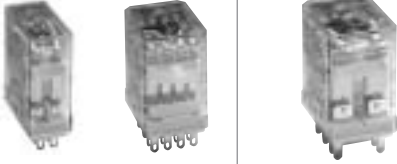
**Selection Guides**

**General Purpose Relays**


	<b>RJ Series</b>	<b>RO Series</b>	<b>RU Series</b>	<b>RH Series</b>	<b>RR Series</b>
<b>Appearance</b>					
<b>Page</b>	E-3	E-6	E-8	E-12	E-18
<b>Contact Configuration</b>	SPDT, DPDT	SPDT, DPDT	DPDT, 4PDT	SPDT, DPDT, 3PDT, 4PDT	SPDT, DPDT, 3PDT
<b>Contact Rating (resistive)</b>	SPDT: 12A, 30V DC/250V AC DPDT: 8A, 30V DC/250V AC	SPDT: 12A, 16A DPDT: 8A	DPDT: 10A, 30V DC/250V AC 4PDT: 6A, 30V DC/250V AC 1/10 HP, 240V AC Bifurcated: 3A 250V AC	10A, 30V DC/240V AC 1/3HP, 240V AC 1/6HP, 120V AC	10A, 30V DC/ 240V AC 1/3HP, 240V AC 1/4HP, 120V AC
<b>Contact Material</b>	Silver-Nickel alloy	Silver-Nickel alloy	DPDT: AgSnOIn (Silver Tin Oxide Indium) 4PDT: AuAg/Ag (Gold-Silver Alloy on Silver)	Silver-Cadmium Oxide	Silver

**E**  
**Relays**




**General Purpose Relays**

	<b>RY/RM Series</b>	
<b>Appearance</b>		
<b>Page</b>	E-22	
<b>Contact Configuration</b>	DPDT, 4PDT	DPDT
<b>Contact Rating (resistive)</b>	RY: DPDT: 3A, 30V DC/240V AC 4PDT: 5A, 30V DC/240V AC Bifurcated: 1A 30V DC/120V AC	5A, 30V DC/240V AC
<b>Contact Material</b>	Standard: Gold plated silver Bifurcated: Ag-Pd	Silver

**Solid State Relays**

	<b>RSS Series</b>
<b>Appearance</b>	
<b>Page</b>	E-36
<b>Contact Configuration</b>	1 Form A (SPST-N0)
<b>Contact Rating</b>	10, 25, 50, 75, 90A 48V AC to 660V AC Output
<b>Output</b>	Dual SCR (zero crossing)

**Latching Relays**

	<b>RR2KP Series</b>	<b>RH2L Series</b>	<b>RY2KS</b>
<b>Appearance</b>			
<b>Page</b>	E-27	E-30	E-33
<b>Contact Configuration</b>	DPDT	DPDT	DPDT
<b>Contact Rating (resistive)</b>	10A, 30V DC 10A, 120V AC	10A, 30V DC 10A, 120V AC 7.5A, 240V AC	3A, 30V DC 3A, 120V AC
<b>Contact Material</b>	Silver	Silver-cadmium oxide	Silver, gold-plated